

Flexe CTA 10

PREMIUM GRADE INTERIOR FLOOR & WALL THIN SET TILE ADHESIVE

Features / Advantages

- Excellent adhesion
- Super fine for a smooth finish
- Economical & Easy to use
- Single component just add water
- Bonds to various substrates
- Easy Mixing
- Exceeds ANSI A 118.1
- Exceeds IS 15477 Class-1 Adhesive standards.
- Can be use external facade with Flexe latex 90.


Substrates

- Concrete
- Concrete Masonry
- Cement Mortar Beds
- Cement Plaster
- Tile on Tile Application
- Brick Masonry
- Cement Terrazzo
- Existing Natural Stone*

* Surface to be cleaned and roughened before installation of tiles or stones.




Premium grade polymer based interior floor & wall thin set tile adhesive for ceramic tiles, vitrified tiles and small format stones on interior floors and walls





Flexe CTA10

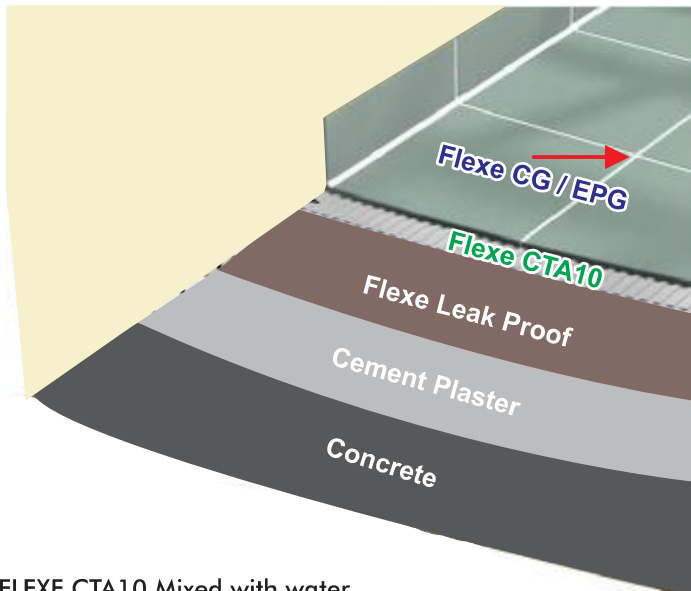

FLEXE CTA10 Mixed with water

Open Time	20 minutes
Pot Life	4 hours
Time to Foot Traffic	24 hours

Specifications subject to change without notification.
Results shown are typical but reflect test procedures used.
Actual field performance will depend on installation methods and site condition.



Mixing

Take clean potable water add FLEXE CTA10 Adhesive powder into the bowl. Mix properly using pedal mixer till workable consistency. Use water / FLEXE LATEX90 approximately 5.5 - 6L for 20kg powder.

Packaging:

20 kg & 50 kg bags

Colour:

Grey

Coverage:

Approx 55-60 sft per 20kg bag (6mm x 6mm)

Coverage will vary depending on trowel notch size, type and size of tile and substrate smoothness and evenness.

FLEXECRETE INDIA PRIVATE LIMITED.,
No.91/3, Pillaiyar Kovil Street,
Pandur Village, Kannivakkam,
Guduvanchery- 603202. Tamil Nadu, India.

Mobile: +91 7010 007117 / 9344 600693

Landline: 044-48597887

e-mail: info@flexecrete.com

Web: www.flexecrete.com



IMPORTANT NOTE: The product information and application recommendations for final use of Flexecrete's products, are given in good faith based on Flexecrete's vast knowledge and experience of products when properly stored, handled and applied under standard conditions as per Flexecrete's recommendations. The user of the product must conduct trials and test to ensure the suitability of the product for intended application and purpose. Owing to the difference in other materials, actual site conditions and on-site workmanship factors which are beyond our control, the company shall not accept any liability either directly or indirectly arising out of use of our products whether or not in accordance with any advice, specification, recommendation or information given by it. Flexecrete reserves the right to customise the properties of the product through minor adjustments or fine tuning in the formulation to meet the exact site requirements testimony to its continuing research and development. Users must refer to the most recent issue of product data sheet, copies of which can be made available on demand. Flexecrete products are manufactured as per stringent national/international quality standards and are guaranteed against any manufacturing defect. All products are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request.