



## Flexe GTA 40

### HIGH POLYMER MODIFIED THIN SET GLASS MOSAIC ADHESIVE FOR INTERIOR AND EXTERIOR

#### Features / Advantages

- ✓ Single component, just add water
- ✓ Exterior / Interior wall and Floor applications,  
Specially Chosen High Polymer modified Polymer
- ✓ Economical & Easy to use
- ✓ Bonds to various substrates
- ✓ Exceeds ANSI A118.4 shear bond strength requirements  
Class 2 types adhesive.
- ✓ Exceeds IS 15477 – Type 2 Adhesive standard
- ✓ Shock Resistance
- ✓ High Flexible properties


#### Substrates

- ✓ Concrete
- ✓ Concrete Masonry
- ✓ Cement Mortar Beds
- ✓ Cement Plaster
- ✓ Mivon Structure
- ✓ Tile on tile application
- ✓ Brick Masonry
- ✓ Cement Terrazzo
- ✓ Gypsum wall board
- ✓ Cement backer board
- ✓ Calcium silicate board

\*Surface to be cleaned and roughened before installation of tiles or stones.




High Polymer modified thin-set adhesive for specially designed for Glass Mosaic Tile for most of the Wet Areas in Interior and Exterior.





## Flexe GTA 40

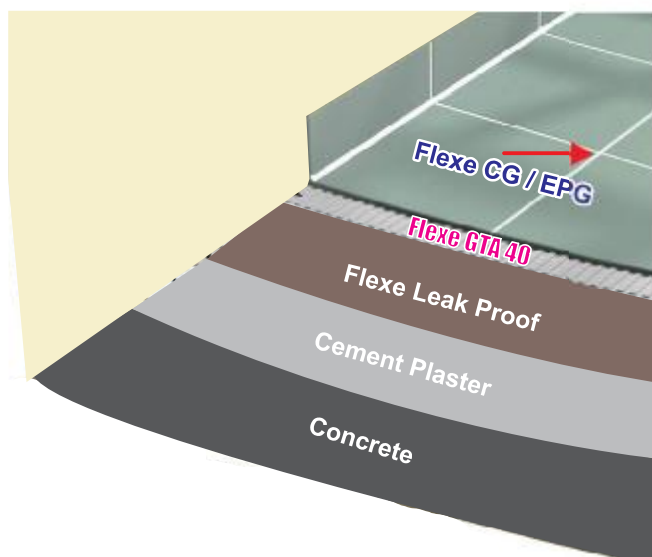

### Flexe GTA 40 Mixed with water

Open Time	30 minutes
Pot Life	4 hours
Time to foot Traffic	24 hours

Specification subject to change without notification. Results shown are typical but reflect test procedures used, Actual field performance will depend on installation methods and site condition.



### Mixing

Take clean potable water add FLEXE GTA 40 Adhesive powder into the bowl. Mix properly using pedal mixer till workable consistency. Use water / FLEXE LATEX90 approximately 5.5 - 6L for 20kg powder.

### Packaging:

20 kg & 50 kg bags

### Colour:

Grey & White

### Coverage:

Approx 55-60 sft per 20kg bag (6mm x 6mm)

For large format stones adhesive thickness should be minimum 6mm required. For exact thickness and coverage please consult Flexecrete technical advise.

Coverage will vary depending on trowel notch size, type and size of tile and substrate smoothness and evenness.

### FLEXECRETE INDIA PRIVATE LIMITED.,

No.91/3, Pillaiyar Kovil Street,  
Pandur Village, Kannivakkam,  
Guduvanchery- 603202. Tamil Nadu, India.

**Mobile:** +91 7010 007117 / 9344 600693

**e-mail:** info@flexecrete.com

**Web:** www.flexecrete.com

**IMPORTANT NOTE:** The product information and application recommendations for final use of Flexecrete's products, are given in good faith based on Flexecrete's vast knowledge and experience of products when properly stored, handled and applied under standard conditions as per Flexecrete's recommendations. The user of the product must conduct trials and test to ensure the suitability of the product for intended application and purpose. Owing to the difference in other materials, actual site conditions and on-site workmanship factors which are beyond our control, the company shall not accept any liability either directly or indirectly arising out of use of our products whether or not in accordance with any advice, specification, recommendation or information given by it. Flexecrete reserves the right to customise the properties of the product through minor adjustments or fine tuning in the formulation to meet the exact site requirements testimony to its continuing research and development. Users must refer to the most recent issue of product data sheet, copies of which can be made available on demand. Flexecrete products are manufactured as per stringent national/international quality standards and are guaranteed against any manufacturing defect. All products are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request.